


**ECONOMICS**

The world shortest stock end length is obtained by the 4 point stock clamping design, which leaves the stock end length as short as 45mm.

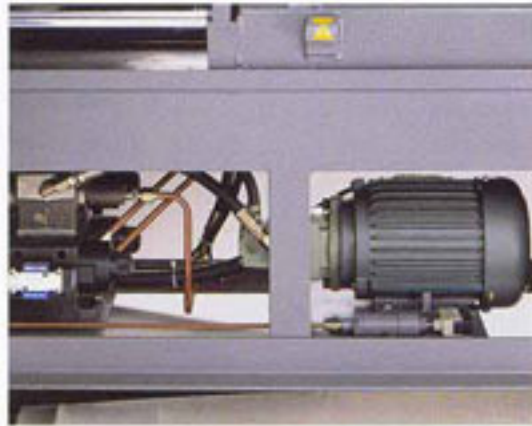

**PERFECT FOR 4 SHIFT OPERATION**

The hydraulic pump runs only for head lift, stock feed and initiating the stock clamp (all in about 15 seconds) periodically between cuts, thus the oil temperature being kept low for long run operation and tremendous saving on energy cost.



**SAFETY BANDWHEEL GUARDING**

Interlocked and Tamper-Proof design provide maximum safety.

# CB-330A



**CUTTING DATA INDICATION**

User-friendly design which guides the operator to easily set the most appropriate blade speed and head descend speed and tooth pitch according to the stock material, size and shape for maximum efficiency.



**ADAPTIVE CUTTING FEED CONTROL**

Automatic adjustment of the head descend speed according to the resistance from cutting maintains optimum cutting feed at all time and results in longer blade life.



**BUNDLE CUTTING**

Dual vice clamping with top clamp by the bundle attachment enable steady and fast bundle cutting



**CHIP CONVEYOR**

Chip conveyor synchronized with cutting provides more efficient cutting operation.

