




HUMAN-MACHINE INTERFACE CONTROL PANEL

Control panel and touch screen are very easy to read and operate. This has multiple functions for setting and programming with an indicator to show abnormal functioning device.

NC人機介面操控面板

控制面板採圖示及觸控式設計，操作方便、故障自動顯示及鋸切尺寸可做多段性之設定與記憶。

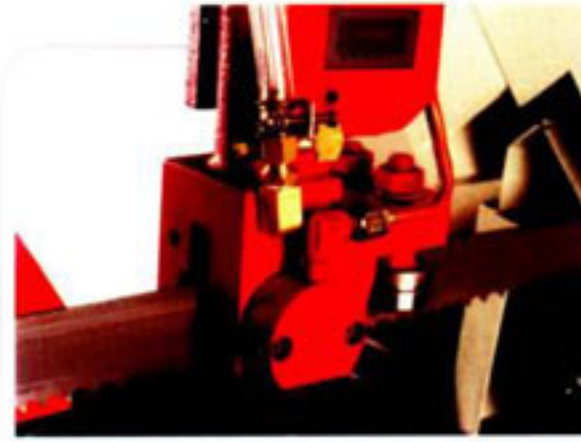


TUNGSTEN CARBIDE GUIDED BLADE BY HYDRAULIC CONTROL

Using hydraulic to set tungsten carbide to guide the blade that is easy to operate and get stable function.

油壓控制式錳鋼導塊導正鋸帶

錳鋼導塊用油壓夾持方式，快速、穩定及方便操作。

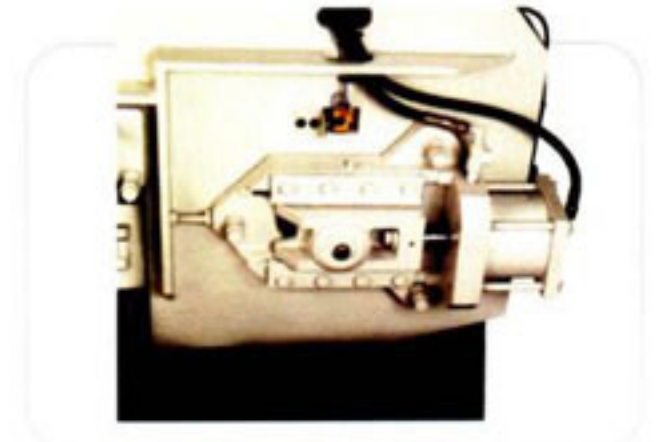

HYDRAULIC BLADE TENSION DEVICE

Blade tension device for easy blade tension setting, It is both quick and precise.

油壓鋸帶張力自動控制裝置

鋸帶張力調整使用油壓缸驅動方式，快速、準確及省力。

SPECIFICATIONS/規格表

Model 型號	WA-530HA
Cutting Capacity 鋸切能力	● 530 mm ■ 530 x 530 mm
Blade Size 鋸帶尺寸	41 x 1.3 x 5980 mm
Blade Speed (60Hz) 鋸帶速度	20 ~ 100 M/m
Blade Motor 鋸帶馬達	5.5 HP (7.5KW)
Hydraulic Motor 油壓馬達	2 HP (1.5KW)
Coolant Motor 冷卻馬達	1/4 HP (0.2 KW)
Hydraulic tank 油壓油箱	100 Liters
Coolant tank 冷卻水箱	110 Liters
Table Height 台面高度	800 mm
Feeding Stroke 送料行程	500 mm
Bundle Cutting (W x H) 束材切割	230 ~ 400mm x 120 ~ 270mm
Mini. Cut Off Length 最小鋸切尺寸	Over 8mm (以上)
Mini. No Material Detecting 最小無料檢知尺寸	25 mm
Packing Measurement 裝箱尺寸L x W x H	3000 x 2150 x 2200 mm
N.W / G. W 淨重 / 毛重	3800 Kg / 4280Kg
Optional Accessories 選配件	Standard Accessories 標準配件
● Pressure regulator for bench vise and shuttle vise 雙虎鉗油壓調壓裝置	● 2-Meter roller stand 2米料架 ● Hydraulic vertical press clamping device 油壓下壓虎鉗



林寶機械貿易私人有限公司

LIM POH MACHINERY TRADING PTE LTD

NO. 111, UBI AVE 4, CIVIC TERRACE WAREHOUSE, SINGAPORE 408761.

E-mail: enquiry@limpoh.com Website: http://www.limpoh.com

TEL: 6846 1138 FAX: 6841 2832

GST Reg.No. M2-0067812-5 Business Reg.No. 198404054E