

- Movable Blade Guide Post and Linear Guides.
活動式導帶支臂及線軌



- Control Panel, Touch Screen and Cut Rate Adjusting Knobs.
操控面板，觸控螢幕及鋸切速率調整旋鈕



- Auto-Adjust Guiding Post Position Device.
導帶支臂自動調整位置裝置



- Chip Conveyor and Coolant Pump.
鐵屑輸送裝置及冷卻邦浦

SPECIFICATIONS / 規格表

Cutting Capacity	● 620 mm ■ 700 x 620 mm
Blade Motor	7.4 KW 10 HP
Hydraulic Pump	2.2 KW 3 HP
Coolant Pump	0.18 KW 1/4 HP
Blade Size	54 x 1.6 x 7600 mm
Blade Speed	20 80 MPM
Hydraulic Tank	80 L
Coolant Tank	140 L
Feeding Stroke	500 mm
Table Height	650 mm
NW./ GW.	6500 kg / 7800 kg

• Standard Parts: 2 M Roller Stand.

Column Type

Fully Automatic Band Saws


龍門式全自動帶鋸機

Precise
精準

Stable
穩固

Durable
耐用

Efficient
高效率

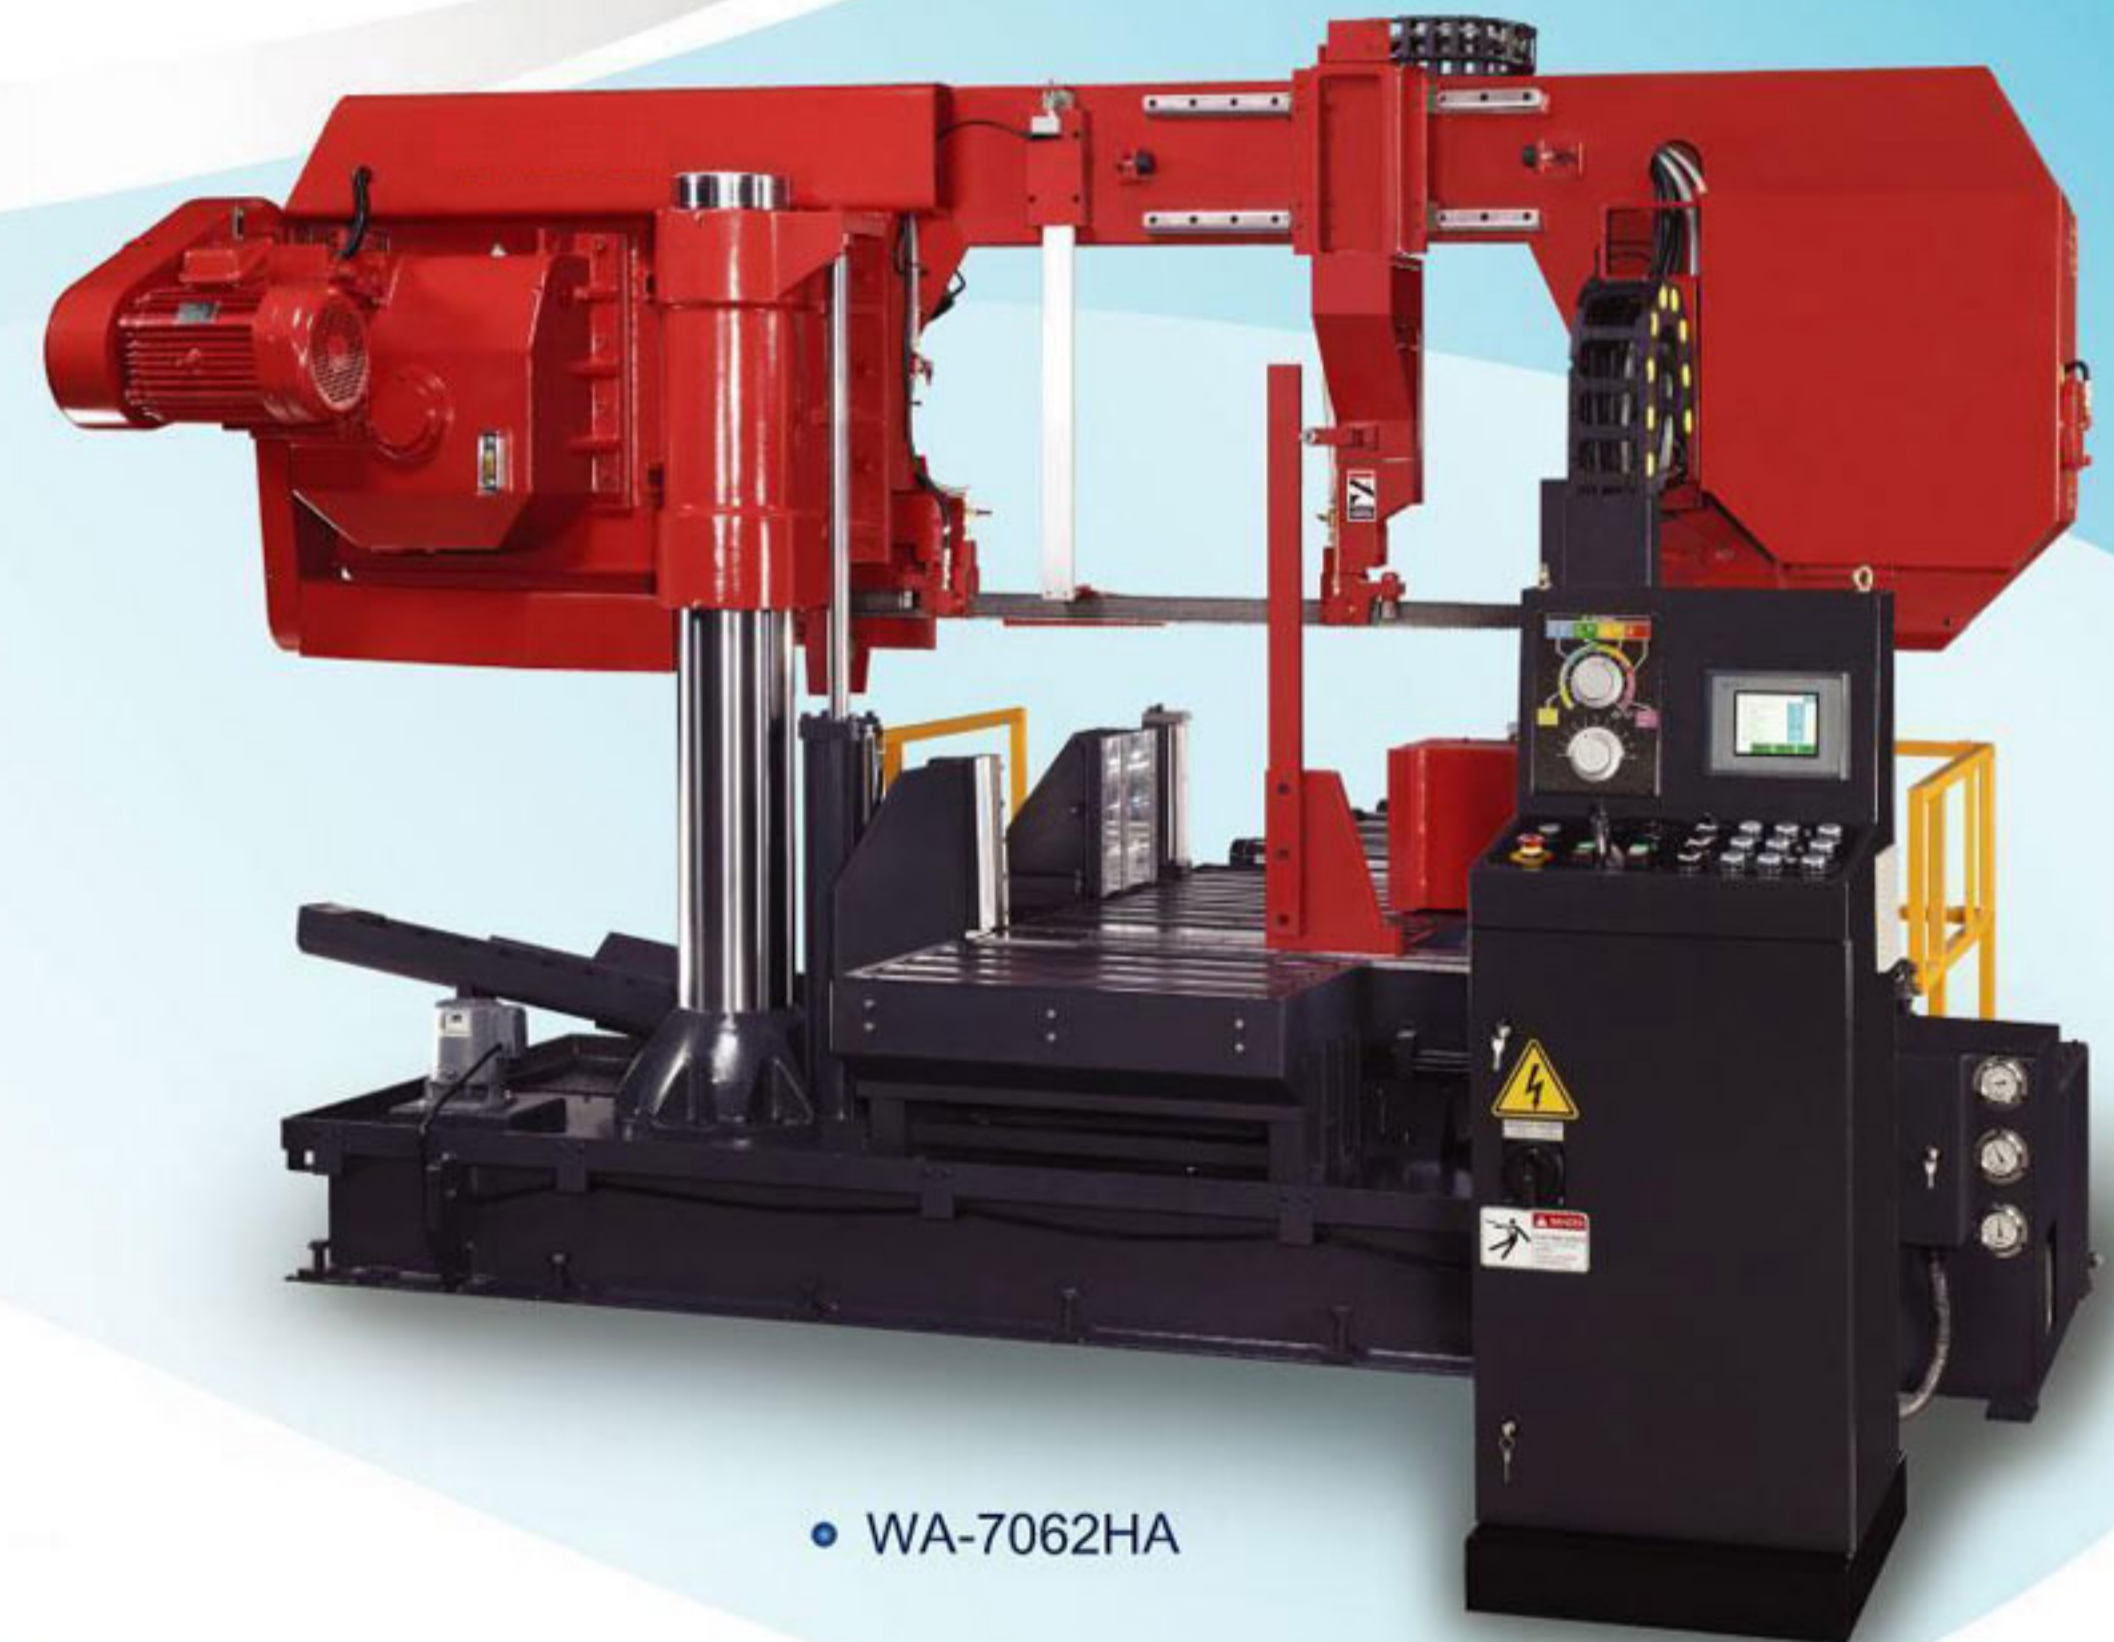

● WA-7062HA



林寶機械貿易私人有限公司
LIM POH MACHINERY TRADING PTE LTD
NO. 111, UBI AVE 4, CIVIC TERRACE WAREHOUSE, SINGAPORE 408761.
E-mail: enquiry@limpoh.com Website: http://www.limpoh.com
TEL: 6846 1138 FAX: 6841 2832
GST Reg. No. M2-0067612-5 Business Reg. No. 198404054E