

SPECIFICATION FOR DY-860/1000/1100G CONVENTIONAL LATHE


型 號 Model		DY-860	DY-1000	DY-1100
機 型 Items		1100G	1600G	2100G 2600G 3100G
旋徑 Swing	中心高度 Height of center	430mm	500mm	550mm
	床面最大旋徑 Swing over bed	860mm	1000mm	1100mm
	橫送台最大旋徑 Swing over cross slide	540mm	690mm	790mm
	凹口最大旋徑及寬度 Swing over gap	1200X530mm	1350X530mm	1450X530mm
	中心距離 Distance between centers	1100 -10000 mm		
主軸箱 Headstock	主軸鼻端 Spindle nose	A1-11		
	主軸孔徑 Spindle bore	標準:STD:105mm / 選配:OPT:153mm		
	主軸速度變換 Spindle speed	12 steps, 9~600rpm		
進給和 螺紋 Feed and thread	導螺桿 Lead screw	50.8mm X 2T.P.I.		
	車製螺紋(英制) Inch thread	29 kinds, 1~28T.P.I.		
	車製螺紋(公制) Metric thread	26kinds, 1.25~28		
	縱向進刀量範圍 Longitudinal feed range	0.10~2.088		
	橫向進刀量範圍 Cross feed range	0.10~2.88		
複合刀架 Tool slide	橫送台移動範圍 Cross slide travel	505mm		
	複合刀架移動範圍 Compound rest travel	250mm		
尾座 Tail stock	尾座軸移動範圍 Spindle travel	200mm		
	尾座軸外徑 Spindle diameter	90mm		
	尾座頂針斜度 Taper of center	MT#5		
馬達 Motor	主驅馬達 Main motor	15HP X6P		
	快速進給馬達 Rapid feed motor	1HP		
	冷卻泵浦 Coolant pump	1/8 HP		
床體 Bed	長度 Length of bed	2700 3200 3700 4200 4700 mm		
	寬度 Width of bed	483mm (19")		
	高度 Height of bed	1400mm		
	淨重 N.W.	3900 4300 4700 5100 5500 kg		
	毛重 G.W.	4300 4700 5100 5500 5900 kg		
	裝箱尺寸 Packing size (L X W)	2900 / 3400 / 3900 / 4400 / 4900 X 1700 mm		

標準配備 Standard accessories

- 冷卻泵浦 Coolant pump 1pc
- 鹵素燈 Halogen work lamp 1pc
- 工具箱 Tool box 1pc
- 四方刀架 4 position tool post 1pc
- 中心頂針 Center MT#5 2pcs
- 中心套筒 Center sleeve 1pc
- 中心架 Steady rest 1pc
- 跟刀架 Follow rest 1pc

選擇配備 Optional accessories

- 花盤 Face plate 1pc
- 夾頭護蓋 Chuck guard 1pc
- 三爪夾頭 3-jaw chuck 1pc
- 四爪夾頭 4-jaw chuck 1pc
- 活動頂針 Rolling center 1pc
- 斜度附件 Taper attachment 1pc
- 排屑機 Chip conveyor 1pc

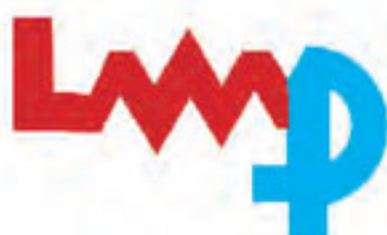

林寶機械貿易私人有限公司
LIM POH MACHINERY TRADING PTE LTD
 NO. 111, UBI AVE 4, CIVIC TERRACE WAREHOUSE SINGAPORE 408761.
 E-mail: enquiry@limpoh.com Website: http://www.limpoh.com
 TEL: 6846 1138 FAX: 6846 2832 H/P: 9788 0138