


◀ SPINDLE UNIT

- R8, NST30, NST40 are available.
- Made from One piece of Ni-Cr alloy steel.
- Supported by two precision angular contact and one ball bearing to ensure rigidity.
- Inner taper was hardened and precision grounded.

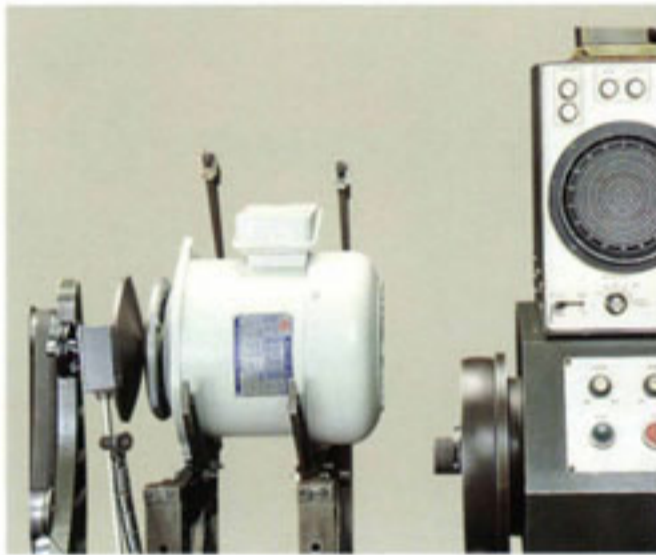

▲ MILLING HEAD GEAR AND QUILL

- Hardened and ground spindle, quite and smooth, free of noise and vibration.
- Use dynamically balanced pulleys and precision bearings.
- 2 Hp to 5 Hp spindle motor are available.
- Spindle back gear running in grease packed housing ensure fatigue strength and low noise.
- Chrome coated and mirror ground finished quill.



▲ LEADSCREW UNIT

- Unique double nuts and backlash adjusting design and enlarged contact face ensuring accuracy over long term and easy for adjustment.
- X and Y axis lead screws are special coating treatment.

▲ WORLD CLASS MANUFACTURING FACILITY

- More than 100 of equipments in machining facility include Machining centers, CNC lathes and CNC grinders.
- Air conditioned facility and ISO 9001 certification ensure the stability quality of mass productions.
- Fully computerized network station offer the efficiency production line and great service for our customers.