
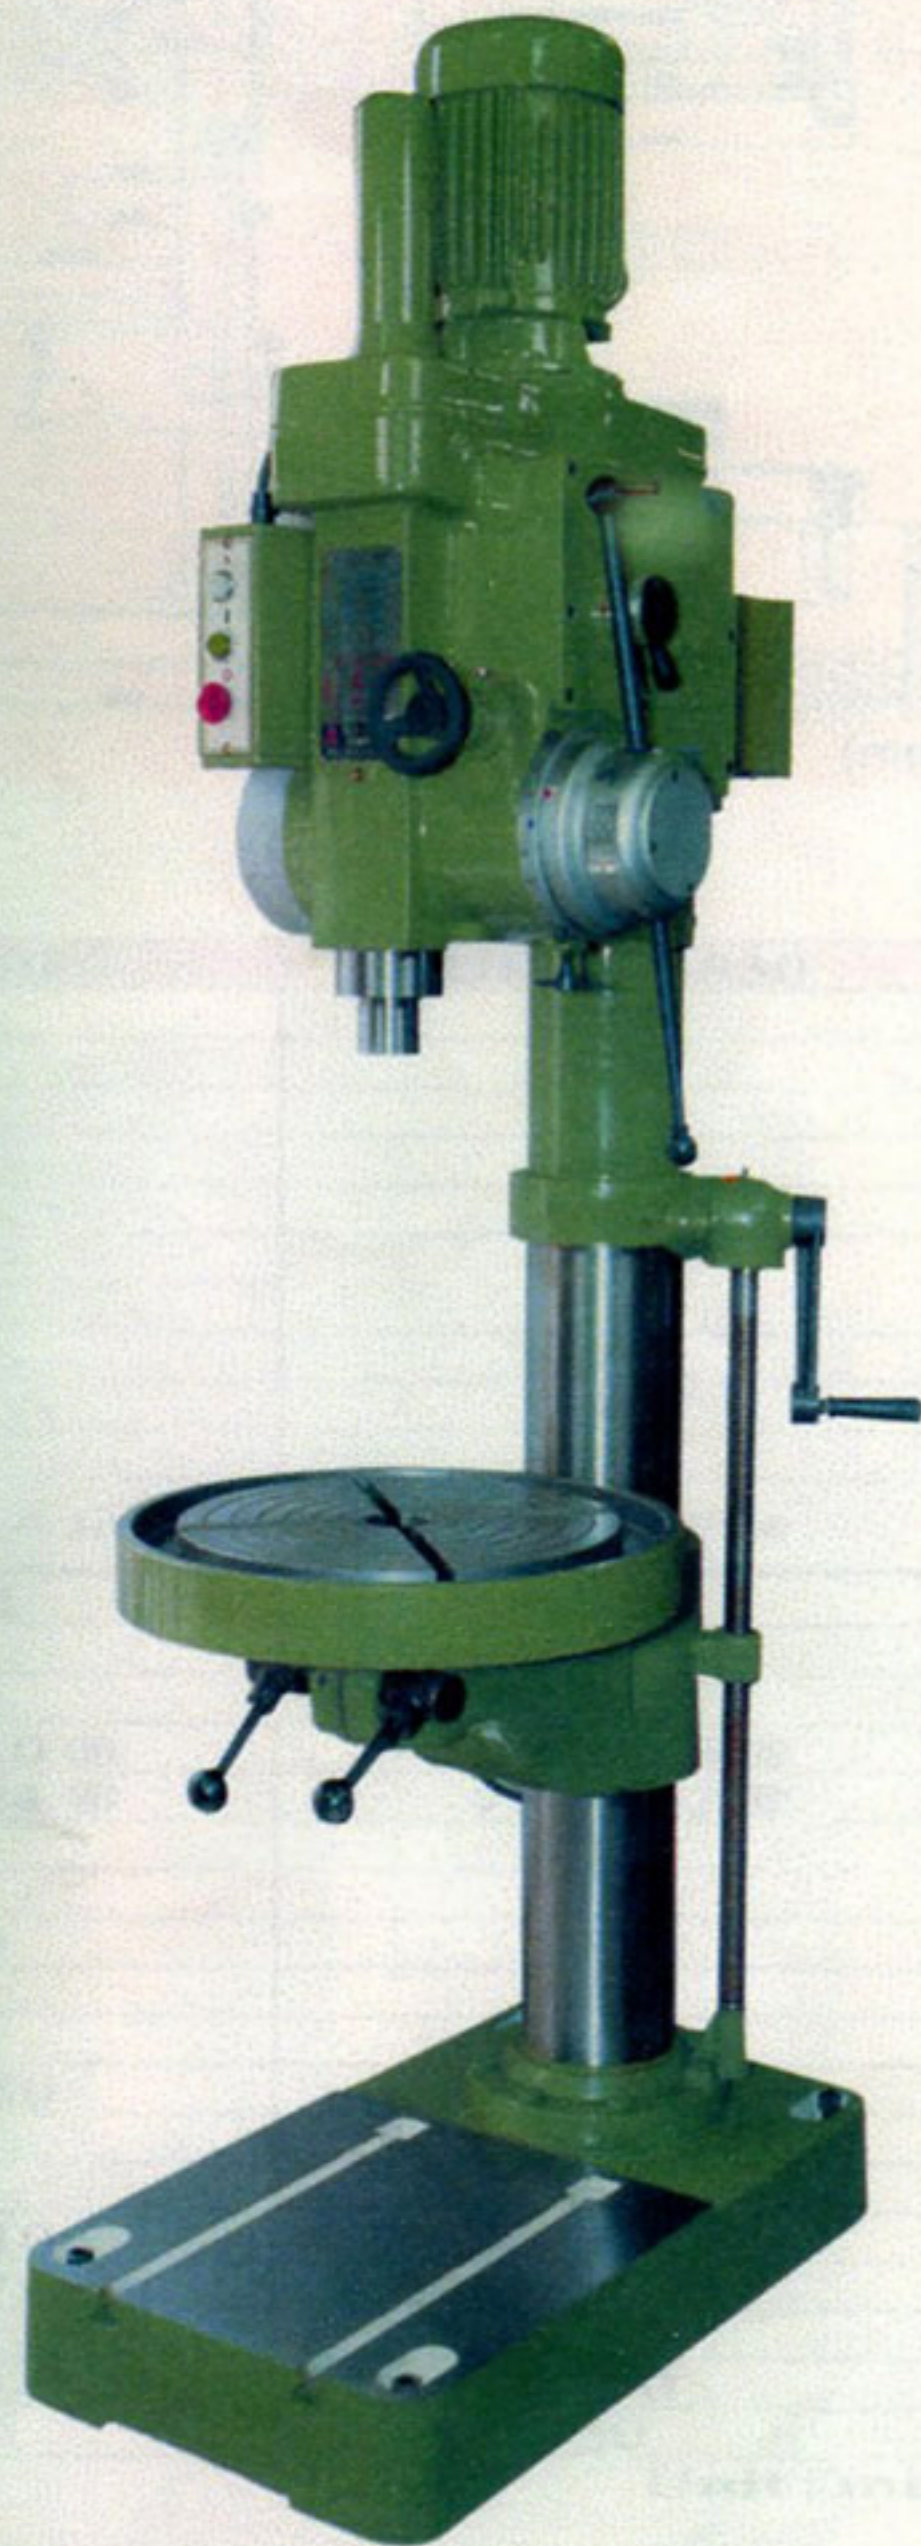


SUD-530FS

SUD-50/530

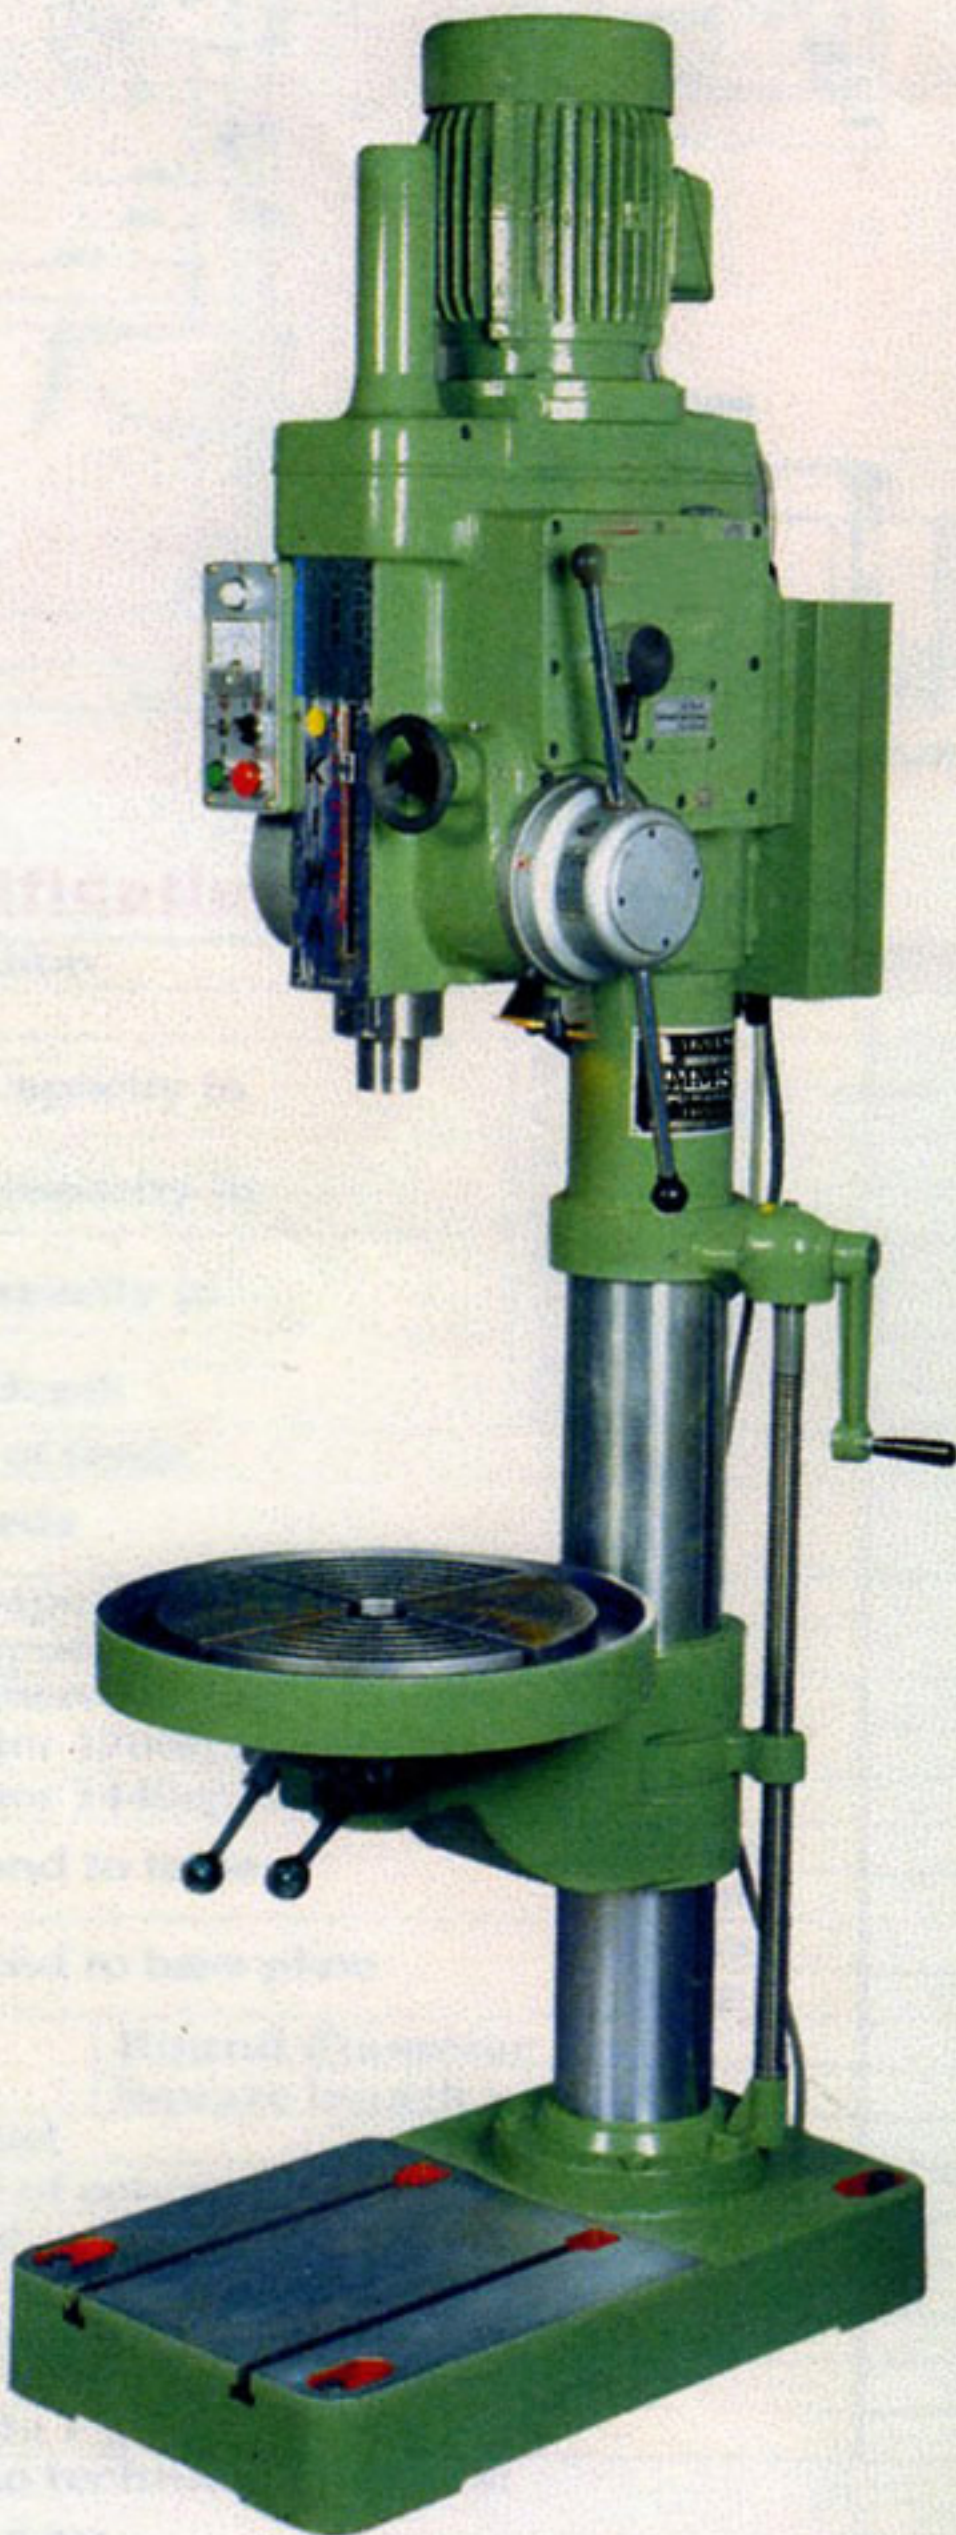

- ◆ New design the infinitely variable feeds for boring 15 -150 mm/min(SUD-50/800).
- ◆ Safety device of feed overload for the protection and safety operation.
- ◆ An automatic stopper is equipped in order to make it available to choose necessary depth.
- ◆ Drilling depth can be adjusted freely with the automatic stopping device for the spindle mechanical feed.
- ◆ The cutting oil tank is built inside the base, and a coolant unit can be equipped(SUD-650, SUD-50/800).