

CSL-150A


HIGH PRECISION SLOTTING MACHINE

●特性：

1. 採用電子制動馬達可作寸動操作。
2. 機體採用高級強韌鑄鐵經回火處理，永不變形。
3. 鉋頭滑動面經高週波硬化處理及精密研磨。
4. 設有分度裝置，可作精密割出。
5. 設有分度盤蝸輪、蝸桿間隙調整及分離裝置。

CHARACTERISTICS

1. Through the use of a brake motor, ram position is easily to obtained with the push button panel.
2. Machine frame is constructed of high tensile cast iron. Tempered to prevent defoumation.
3. All ram slides have been hardened and precision ground.
4. Indexing device of the table are attached to standard machine.
5. The clearence between worm and worm gear can be adjusted or released.

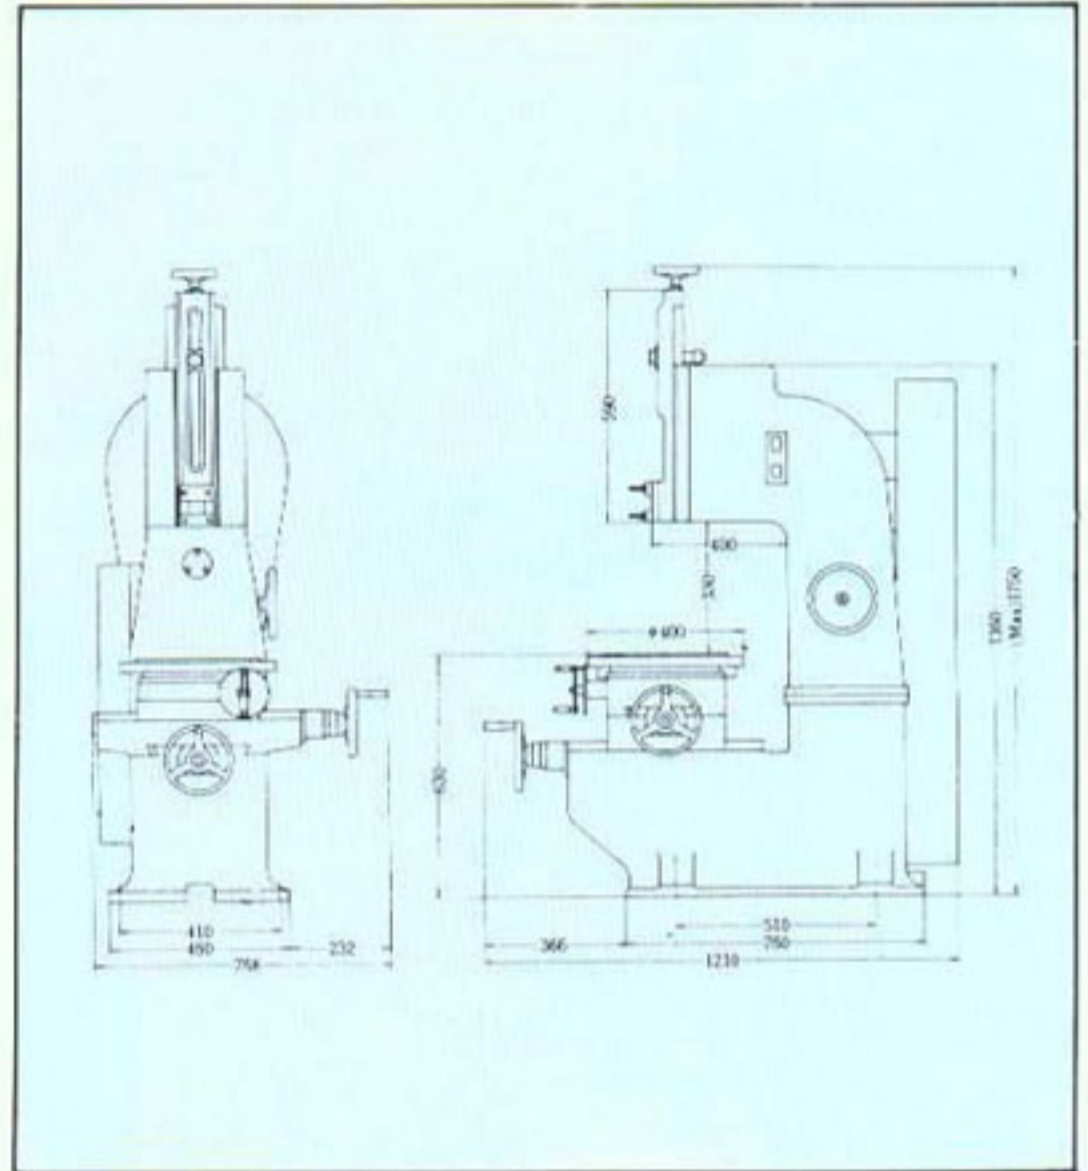

單位 UNIT: mm

型 式	MODEL	CSL-150A	
衝 程	Stroke	165	●標準附屬品 軋頭底座...1 起子...2 分度盤...3 扳手...2 工具箱...1 基礎板...4 衝程調整起子...1 ●特別附屬品 軋頭...1 刀架組...1 夾具...1 STANDARD EQUIPMENT Chuck seat plate 1p.c Indexing plate 3p.c Tool box 1 Driver 2p.c Spanner..... 2p.c Stroke adjustment driver...1p.c a plate..... 4pcs SPECIAL EQUIPMENT Chuck, Clamping kits, Slotting bar set.
分 度 比	Indexing ratio	1:80	
工作台面積	Diameter of work table.	400 φ	
工作台左右移動距離	Longitudinal travel of work table	300	
工作台前後移動距離	Transversal travel of work table	260	
主 軸 速 度	Ram speed (spm)	30, 49, 74, 122	
驅 動 馬 達	Drive motor	1HP 3 φ, 4P, 220V	
裝 箱 尺 寸	Packing dimension	1200Lx750Wx1570H	
淨 重	Net weight	750kg	



林寶機械貿易私人有限公司

LIM POH MACHINERY TRADING PTE LTD

NO. 111, UBI AVE 4, CIVIC TERRACE WAREHOUSE, SINGAPORE 408761.

E-mail: enquiry@limpoh.com Website: http://www.limpoh.com

TEL: 6846 1138 FAX: 6841 2832

GST Reg.No. M2-0067812-5 Business Reg.No. 198404054E